

DSB

Decking Screw



Overview

The Decking Screw is narrow head screw specifically designed to fit between decking boards. The square drive, specialist fixing is made from A4 stainless steel and comes in two lengths. The screw is black coated and self-drills into all RYNO* aluminium joists. An ultra-hard version is available to special order for fixing directly into balcony steels.

- Square drive
- A4 Stainless Steel
- Self-drill into RYNO® joists



Details

Material	Stainless Steel A4, with black surface treatment
Dimensions	3.9mm diameter thread, available in 2 lengths, 15mm and 30mm, square drive number 1
Drive type	Square Drive #1

Performance

Reaction to fire (BS EN 13501-1)	Inherently A1 (Decision 94-611/EC)		
Allowable load	See "Design resistance" below		
Design resistance (EN 1999-1-4:2007 + AC:2010 + A1:2011)	0.75kN (75kg) per screw when fixed into 2mm thick materials.		
Biological and chemical	Corrosion category C5 - Industry and coastal areas with high humidity and aggressive atmosphere. Constant condensation and heavily polluted atmosphere.		


Got questions? Give us a shout.

Visit www.rynosystems.com or call us today on +44 (0)203 967 3500 or reach out on sales@rynosystems.com



Compatible components

	DS Aluminium Joist		AC AluClip
	VCT		СТС
	Decking Clip - Vitrified Composite		Decking T-Clip - Composite
	СМС		CSC
	Decking Metal Clasp Clip		Decking Starter/End Clip

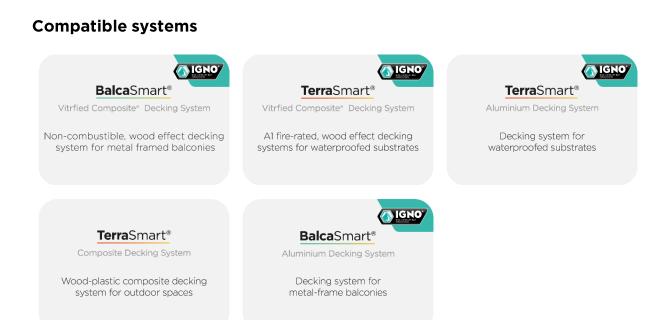

Got questions? Give us a shout.

Visit www.rynosystems.com or call us today on +44 (0)203 967 3500 or reach out on sales@rynosystems.com